


PRODUCT CODE: MP250160
ECO-FRIENDLY STANDARD FOOT

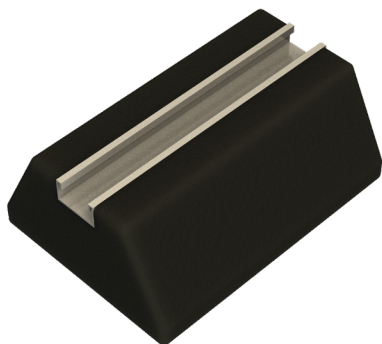

DESCRIPTION

250 x 180mm Eco-Friendly Standard Foot

FINISH

Foot: Black / Channel: Pre-Galvanised

MATERIAL




Foot: SBR Recycled Rubber / Channel: Pre-Galvanised Steel

PACKAGING

Supplied individually

ADDITIONAL NOTES

Max. loading per foot: 160kg
 Suitable for internal & external applications between -40°C to +80°C
 'Bonded' 41 x 21mm channel designed for use with standard channel fixings

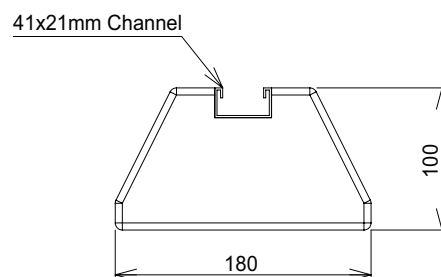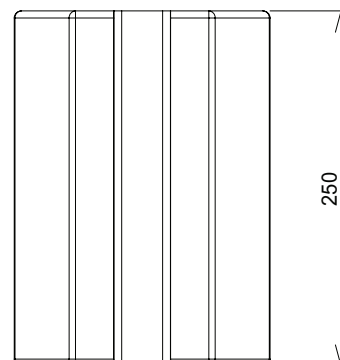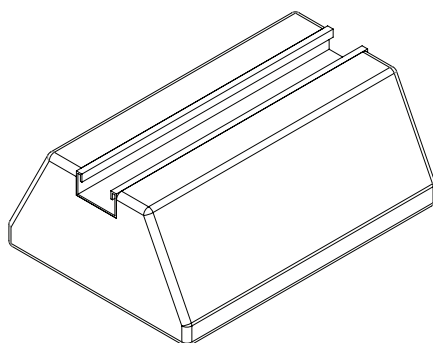

 Values are nominal and with a general tolerance $\pm 5\%$ unless otherwise specified

PRODUCT CODE: MP400240
ECO-FRIENDLY STANDARD FOOT



DESCRIPTION

400 x 180mm Eco-Friendly Standard Foot

FINISH

Foot: Black / Channel: Pre-Galvanised

MATERIAL




Foot: SBR Recycled Rubber / Channel: Pre-Galvanised Steel

PACKAGING

Supplied individually

ADDITIONAL NOTES

Max. loading per foot: 240kg
 Suitable for internal & external applications between -40°C to +80°C
 'Bonded' 41 x 21mm channel designed for use with standard channel fixings

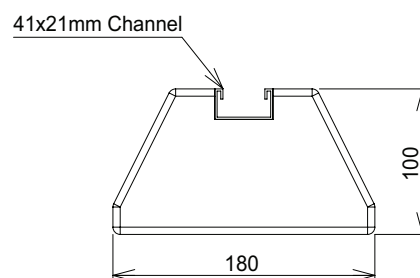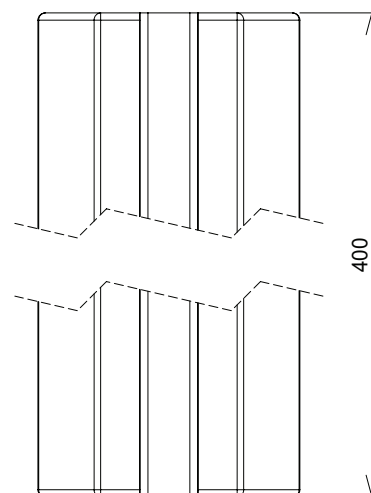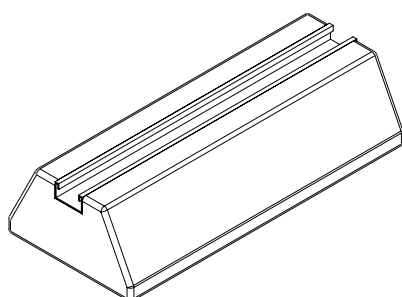

Values are nominal and with a general tolerance $\pm 5\%$ unless

PRODUCT CODE: MP600450
ECO-FRIENDLY STANDARD FOOT



DESCRIPTION

600 x 180mm Eco-Friendly Standard Foot

FINISH

Foot: Black / Channel: Pre-Galvanised

MATERIAL



Foot: SBR Recycled Rubber / Channel: Pre-Galvanised Steel

PACKAGING


Supplied individually

ADDITIONAL NOTES

Max. loading per foot: 450kg
 Suitable for internal & external applications between -40°C to +80°C
 'Bonded' 41 x 21mm channel designed for use with standard channel fixings

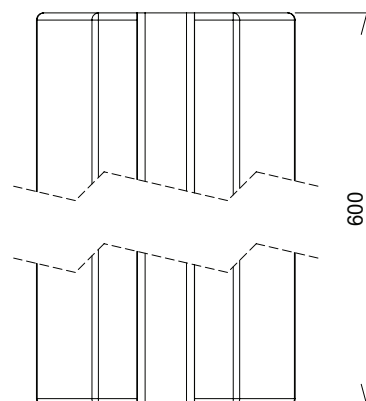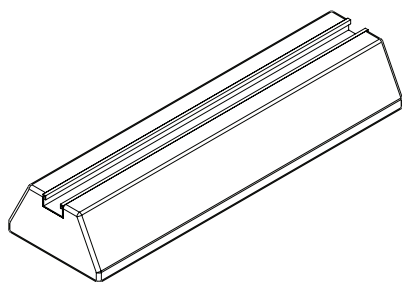

41x21mm Channel



 Values are nominal and with a general tolerance $\pm 5\%$ unless otherwise specified

PRODUCT CODE: MP1000645
ECO-FRIENDLY STANDARD FOOT



DESCRIPTION

1000 x 180mm Eco-Friendly Standard Foot

FINISH

Foot: Black / Channel: Pre-Galvanised

MATERIAL




Foot: SBR Recycled Rubber / Channel: Pre-Galvanised Steel

PACKAGING

Supplied individually

ADDITIONAL NOTES

Max. loading per foot: 645kg
 Suitable for internal & external applications between -40°C to +80°C
 'Bonded' 41 x 21mm channel designed for use with standard channel fixings

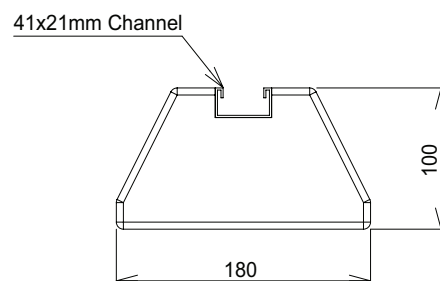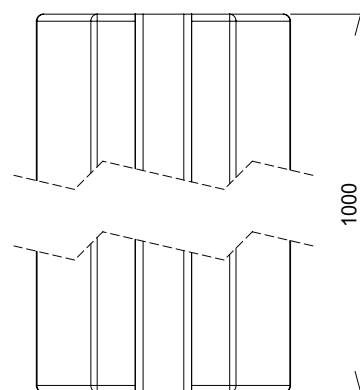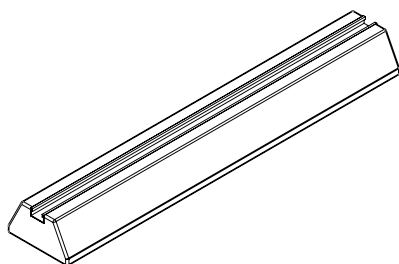

 Values are nominal and with a general tolerance $\pm 5\%$ unless otherwise specified